



A Product of US Duct, Inc.

The Ultimate Seal®

www.us-tubing.com

The Ultimate Seal®

Bid Specifications

Clamp




US Tubing's Clamp-Connect tubing is airtight, thanks to fully welded seams and fittings, and a clamp and gasket joining system.

Clamps are available in a over center handle with safety latch for positive or negative pressure systems.

The US Tubing clamp consists of a .060 (16 Gauge) 304 stainless steel custom contoured band with brackets spot welded onto it. The clamp is divided into two sections for easier installation. The two sections consist of a riveted latch, over-center handle with a spot-welded retention ring and an opposing bracket with a 1/4" socket head cap screw for tightening the clamp after assembly.

All clamps are made of type 304 2B Stainless Steel.

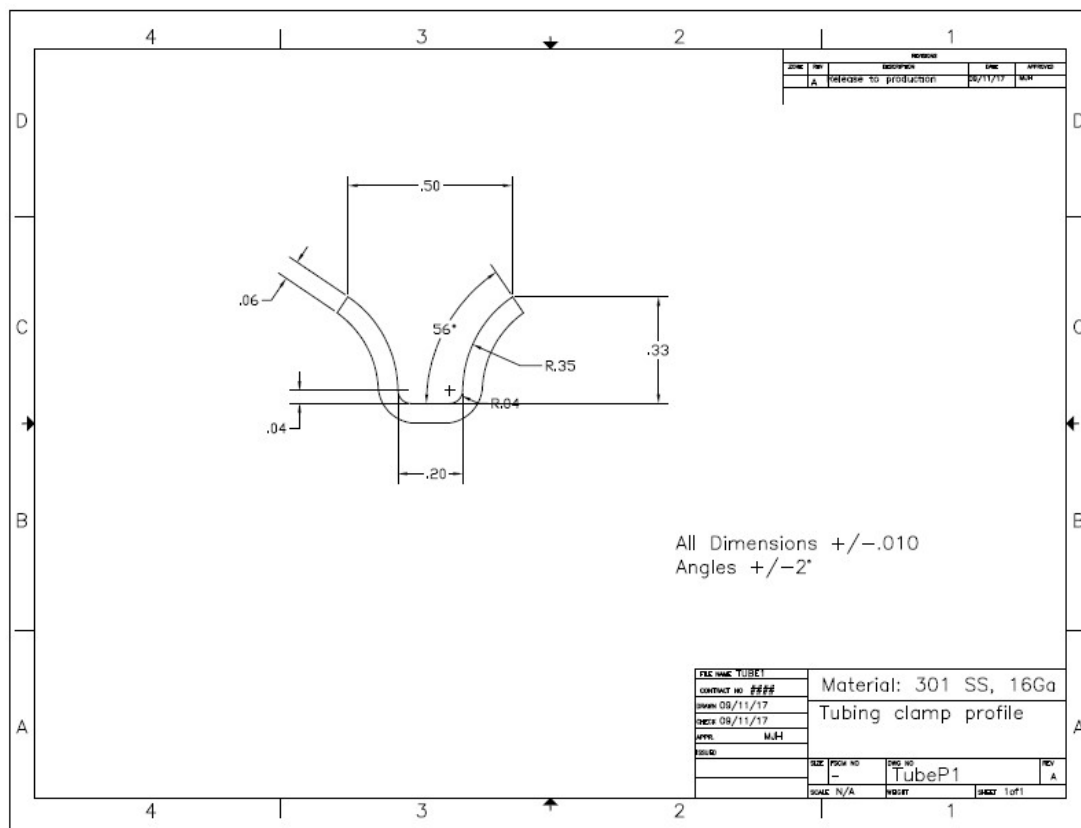

Clamp-Connect or Flange-Connect Options!